



AT-FCAPC-S-05



AT-SC-S-05



AT-LC-S-05



AT-ST-S-05

Konnektör tipleri / Connector types: SC,FC,LC,MU,ST


Zayıflama / Attenuation: 1 - 30 dB

Tolerans / Tolerance: 1 - 5 dB +/- 0.5 6 - 30 +/- %10

Dalgaboyu / Wavelength: 1310 nm & 1550 nm

Geri yansımaya / Back reflection: UPC - 55dB & APC - 60dB

Çalışma sıcaklığı / Operating temperature: -40 to 85 °C

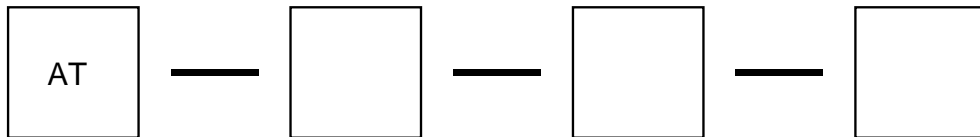

SC
SC APC
FC
FC APC
LC
MU
ST

S= Singlemode
M= Multimode

05= 5dB
10= 10dB
15= 15dB
20= 20dB
25= 25dB

